


NS-15/V Single Axis Inclinometer

With Analog Output

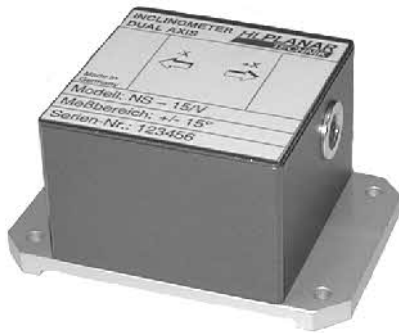

The NS-15/V single-axis inclinometer is a member of a family of high performance, competitively priced, single and dual-axis inclinometers. The heart of every Inclinometer is a small, state-of-the-art, inclination sensor. The sensor, which is comprised of a molded, ceramic case bonded, via a glass sealing process, to a ceramic substrate. Thin film, platinum electrodes are deposited on the substrate. Then the chamber is partially filled with electrolytic fluid and hermetically sealed. The molded, ceramic, sensor housing combined with a precise, planar electrode geometry yields excellent performance and consistent part-to-part uniformity.

Applications


- Zero point detection
- Alignment and level control
- Angle

Advantages

- Wide range of application
- Low vibration sensitivity
- Low price


The V-type sensors have an internal pre-processor and produce a +/-2 V analog output. They have a compact sturdy design and a whole range of uses are possible thanks to the possibility of many different external-switching combinations. With their machined, aluminum baseplate and IP 65 housing, they are an ideal choice for a variety of industrial, automotive and aerospace applications.

Pinout




1	+Ub	Supply Voltage
2	GND	Ground
3	Erde	Earth
4	GNDx	Ground for analogue output Ux
5	n.c.	n.c.
6	Ux	Voltage output Ux
7	n.c.	n.c.

Diagram (angle vs. Output signal)

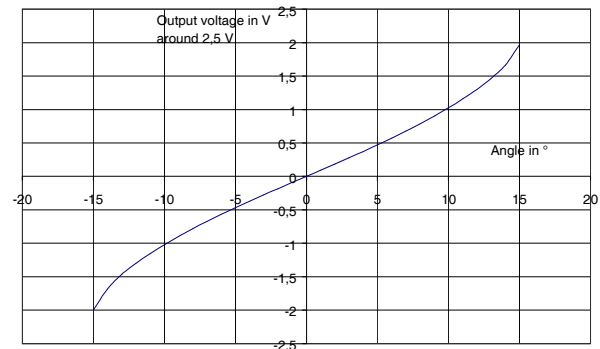

Dimensions (mm)

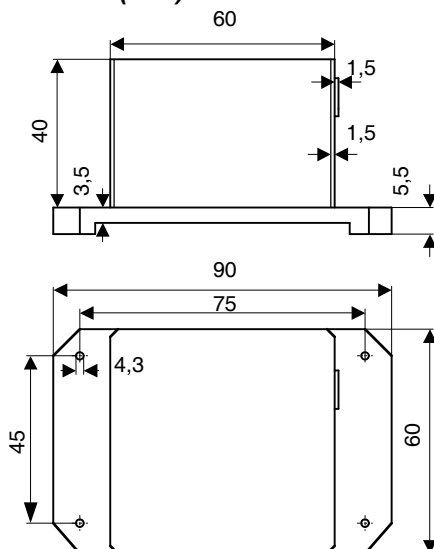

Specifications

Range:	$\pm 15^\circ$
Precision:	0.03° for -3°... +3° 0.08° for -10°... +10°
Resolution:	0.001°
Temperature stability:	Zero point: Sensitivity:
	0.1° for 0°C ... +50°C 0.3° for 0°C ... +50°C
Analog Output:	-2V (-15°) to +2V (+15°)
Operating temp. Range:	0°C ... +70°C
Storage temp. Range:	-40°C ... +85°C
Supply voltage:	+12 ... +24VDC
Current consumption:	~ 9mA
Protection class:	IP 65
Connection:	Connector or Pigtail